

We help you solve challenges

Quality radio modules for wireless data communication

Machines meet radio technology

Accurate and up-to-date data transfer in precise positioning systems is vital. SATEL's radio modems and modules offer a first-class solution e.g. for GNSS RTK, remote measurement, safety systems and control applications. They combine quality, continuity, flexibility and low life cycle costs. Examples of GNSS systems that use SATEL's radio modems and modules include land surveying, precision farming, machine control, harbor logistics and port cranes.

OEM

SATEL have produced a range of OEM radio modules for system manufacturers to integrate into customer solutions. They are secure, customizable and flexible in mounting options. SATEL's solutions are widely compatible and also support other manufacturers' radio protocols.




Read more: www.satel.com

SATELGO

Mission-Critical Connectivity

SATEL is the world's leading expert and innovator in independent radio networking technology. We develop and sell high quality private radio technology solutions that enable secure, mission-critical connections. We are known for our high quality, expertise, service and support.

You can contact us directly or get in touch with your local distributor.

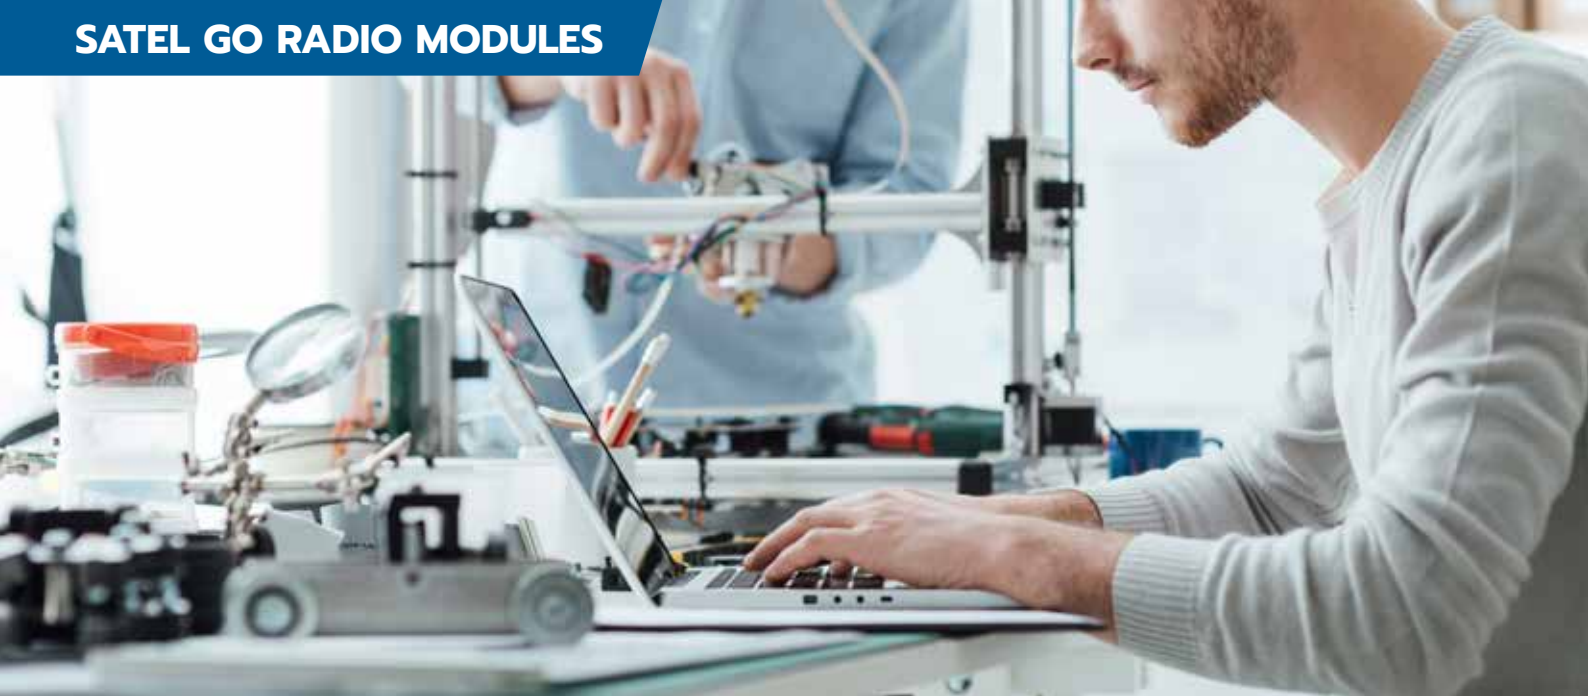

Small module on the move

SATEL-TR489 is a multifrequency and multimode transceiver. It has three frequency bands for the client to select and set: licensed 403 ... 473 MHz and license-free 902 ... 928 MHz and 856 ... 876 MHz bands. It is compatible with other widely used SATEL products on corresponding frequencies and also with other manufacturers' radio protocols.



SATEL-TR489

RADIO TRANSCEIVER SPECIFICATIONS

403 ... 473 MHz

Frequency range

403 ... 473 MHz

Tuning range

70 MHz

Channel spacing

12.5 / 25 kHz, selectable

Sensitivity/Carrier power

-113 dBm BER $10E^{-2}$ / 1 W

Data speed

Radio 19200 bps /
Serial 115200 bps

Modulation

4FSK, 8FSK, 16FSK

856 ... 876 MHz

Frequency range

856 ... 876 MHz
(869.400 ... 869.650 MHz *)

Tuning range

20 MHz

Channel spacing

25 / 50 kHz, selectable

Sensitivity/Carrier power

-112 dBm BER $10E^{-2}$ / 0.5 W

Data speed

Radio 19200 bps /
Serial 115200 bps

Modulation

4FSK

902 ... 928 MHz

Frequency range

902 ... 928 MHz

Spreading method

Frequency hopping

Hopping bands

7, user selectable

Hopping patterns

15 per band, 105 total,
user selectable

Hopping channels

50-112, user selectable

Sensitivity/Carrier power

-108 dBm BER $10E^{-2}$ / 1 W

Data speed

Radio / Serial 115200 bps

Modulation

2-GFSK

GENERAL SPECIFICATIONS

Vibration tolerance

25 G, up to 2 kHz sinusoidal

Operating voltage

+3.8 ... 5.5 Vdc

Power consumption (RX / TX)

400 MHz: 940 mW / 6.8 W (1 W)

800 MHz: 960 mW / 5.6 W (0.5W)

900 MHz: 420 mW / 4.3 W (1 W)

Size / Weight

57 x 36 x 6.9 mm / 20 g

Connectors

1.27 mm pitch socket / U.FL

Interface

CMOS-UART

Temperature range

-30 ... +70 °C (operational)

-20 ... +55 °C (complies with the standards)

Values are subject to change without a notice.

SATEL-TR489 complies with the requirements in:
EU, USA, Canada, India, Australia and New Zealand.

*) Tested acc. to EN 300 220-2 v3.2.1 and EN 300 220-1 v3.1.1

SATEL Oy
Meriniitynkatu 17, P.O.Box 142
FI-24101 Salo, FINLAND
Tel. +358 2 777 7800
info@satel.com

SATELGO

Mission-Critical Connectivity