

Supreme reliability and security

The heart of SATEL XPRS

**IP RADIO
ROUTER**

SATELxprs

Mission-Critical Connectivity



IP RADIO ROUTER

SATEL XPRS IP radio router, the heart of the SATEL XPRS communications solution, is an excellent choice for data transfer in mission-critical applications requiring long range, security and stability of the private radio network. It provides high available connectivity, with reliable radio technology and switchover functionality. Redundant routing with other, adjacent, technologies is also provided. In addition to IP communications, support for serial components is ensured by serial modes of operation as well as protocol conversions. With its advanced coding technologies, excellent sensitivity and performance values, the SATEL XPRS IP radio router is the market leader in the spectral efficiency.



MISSION-CRITICAL CONNECTIVITY REQUIREMENTS

- High available, long range connectivity
- Easy and error free deployment
- Integrated serial and IP networking support and conversions
- Protect the legacy investments
- Combine with adjacent technologies:
- Automated switch overs with redundant routing protocols
- Avoid costs of endangered cyber security



EASY CONFIGURATION

- NETCO centralized configuration software
- Web browser based user interface
- SNMP for remote management
- SATEL NMS for serial networking
- Over-the-air remote management and firmware updating
- Firmware and configuration uploads via USB
- Error free configuration and automated parameter calculation
- Up to 80% savings by reduced deployment time
- Avoid human configuration errors



CYBER SECURITY

- Data encryption according to AES-128 / AES-256 standards
- Built-in firewall
- User authentication
- SATEL cyber security auditing procedures
- Data and management network separation
- Secure browser access

Long range	VLAN	Unicast Broadcast	Bridge mode	NETCO	Redundant routing	SNMP monitoring	Radio data up to 230 kbps
Protocol conversions	IEC-104/101, DNP3, Modbus TCP/RTU	Firewall	0.1-5 W TX-power	Interoperability	Serial over IP	Cyber security	UHF / VHF

SATELLAR XT 5R




SATELLAR XT 5RC


SATELLAR XT 5RC
w. DISPLAY


Name	XT 5R (FSK)				XT 5RC (FSK)				XT 5R (QAM)				XT 5RC (QAM)			
Model / Type identification	SATELLAR RU / TA-26				SATELLAR RU / TA-26				SATELLAR RU-Q / TA-26				SATELLAR RU-Q / TA-26			
SATEL order code with display	YF0100				YF0110 YF0120				YF0200 UHF / YF0500 VHF				YF0210 UHF / YF0510 VHF YF0220 UHF / YF0520 VHF			
Frequency MHz	360-405				400-445				135-175				360-405			
	440-485				400-445				400-445							
Modulations	4, 8, 16 FSK				2, 4, 8, 16, 32, 64 QAM (2QAM only for UHF frequencies)											
Tuning range	40 / 45 MHz															
Channel width	12.5 / 25 / 150 kHz				12.5 / 25 kHz											
Data speed radio (max.)	19.2 kbps @ 12.5 kHz 38.4 kbs @ 25 kHz (16FSK) 230 kbps @150 kHz (16FSK)				60.5 kbps @ 12.5 kHz (64QAM) 121 kbps @ 25 kHz (64QAM) Max.coded											
RX sensitivity (BER 10E-6)	Air speed	Channel width	Modulation	Sensitivity (10E-6)	Air speed	Channel width	Modulation	Sensitivity (10E-6) UHF / VHF	Air speed	Channel width	Modulation	Sensitivity (10E-6) UHF / VHF	Air speed	Channel width	Modulation	Sensitivity (10E-6) UHF / VHF
	230.4 kbps	150 kHz	16FSK	-82 dBm	121 kbps	25 kHz	64QAM	-98 / -98 dBm	121 kbps	25 kHz	64QAM	-98 / -98 dBm	121 kbps	25 kHz	64QAM	-98 / -98 dBm
	38.4 kbps	25 kHz	16FSK	-94 dBm	60.5 kbps	12.5 kHz	64QAM	-100 / -99 dBm	60.5 kbps	12.5 kHz	64QAM	-100 / -99 dBm	60.5 kbps	12.5 kHz	64QAM	-100 / -99 dBm
	19.2 kbps	12.5 kHz	16FSK	-97 dBm	80.6 kbps	25 kHz	16QAM	-105 / -104 dBm	80.6 kbps	25 kHz	16QAM	-105 / -104 dBm	80.6 kbps	25 kHz	16QAM	-105 / -104 dBm
	115.2 kbps	150 kHz	4FSK	-97 dBm	40.3 kbps	12.5 kHz	16QAM	-106 / -106 dBm	40.3 kbps	12.5 kHz	16QAM	-106 / -106 dBm	40.3 kbps	12.5 kHz	16QAM	-106 / -106 dBm
	19.2 kbps	25 kHz	4FSK	-108 dBm	40.3 kbps	25 kHz	4QAM	-111 / -110 dBm	40.3 kbps	25 kHz	4QAM	-111 / -110 dBm	40.3 kbps	25 kHz	4QAM	-111 / -110 dBm
	9.6 kbps	12.5 kHz	4FSK	-114 dBm	20.2 kbps	12.5 kHz	4QAM	-113 / -113 dBm	20.2 kbps	12.5 kHz	4QAM	-113 / -113 dBm	20.2 kbps	12.5 kHz	4QAM	-113 / -113 dBm
TX power (nominal)	37 dBm (5 W)				37 dBm (5 W) mean: average 30 dBm (1 W), max 32 dBm (1.5 W) PEP: average 37 dBm (5 W), max 38 dBm (6.6 W)											
Interface	RS-232, -422 / -485				RS-232, -422 / -485, USB, Ethernet				RS-232, -422 / -485				RS-232, -422 / -485, USB, Ethernet			
Operating voltage	+ 10.6 Vdc ... +30 Vdc															
Temperature ranges	-25 ...+55 °C complies with the radio standards -30 ...+70 °C functional -40 ... +85 °C storage															
Mounting	DIN rail (side or back) Direct on flat surface															
Standards compliance*)																
Radio					EN 300 113 EN 302 561				EN 300 113							
EMC	IEC 6100-6-2 IEC 6100-6-4				EN 301 489-1, -5				EN 301 489-1, -5							
Safety					EN 60950-1											
Power consumption without display TX / RX	22.8 / 2.8 W				24.4 / 4.2 W				UHF 14.4 / 3.8 W				UHF 15.8 / 5.2 W			
with display TX / RX					24.8 / 4.8 W				VHF 16 / 4.4 W				VHF 16.4 / 5.8 W			

PRBS (Pseudorandom Binary Sequence), measured with 30 V add 2.5 W for connected USB devices

*) Contact SATEL for more information

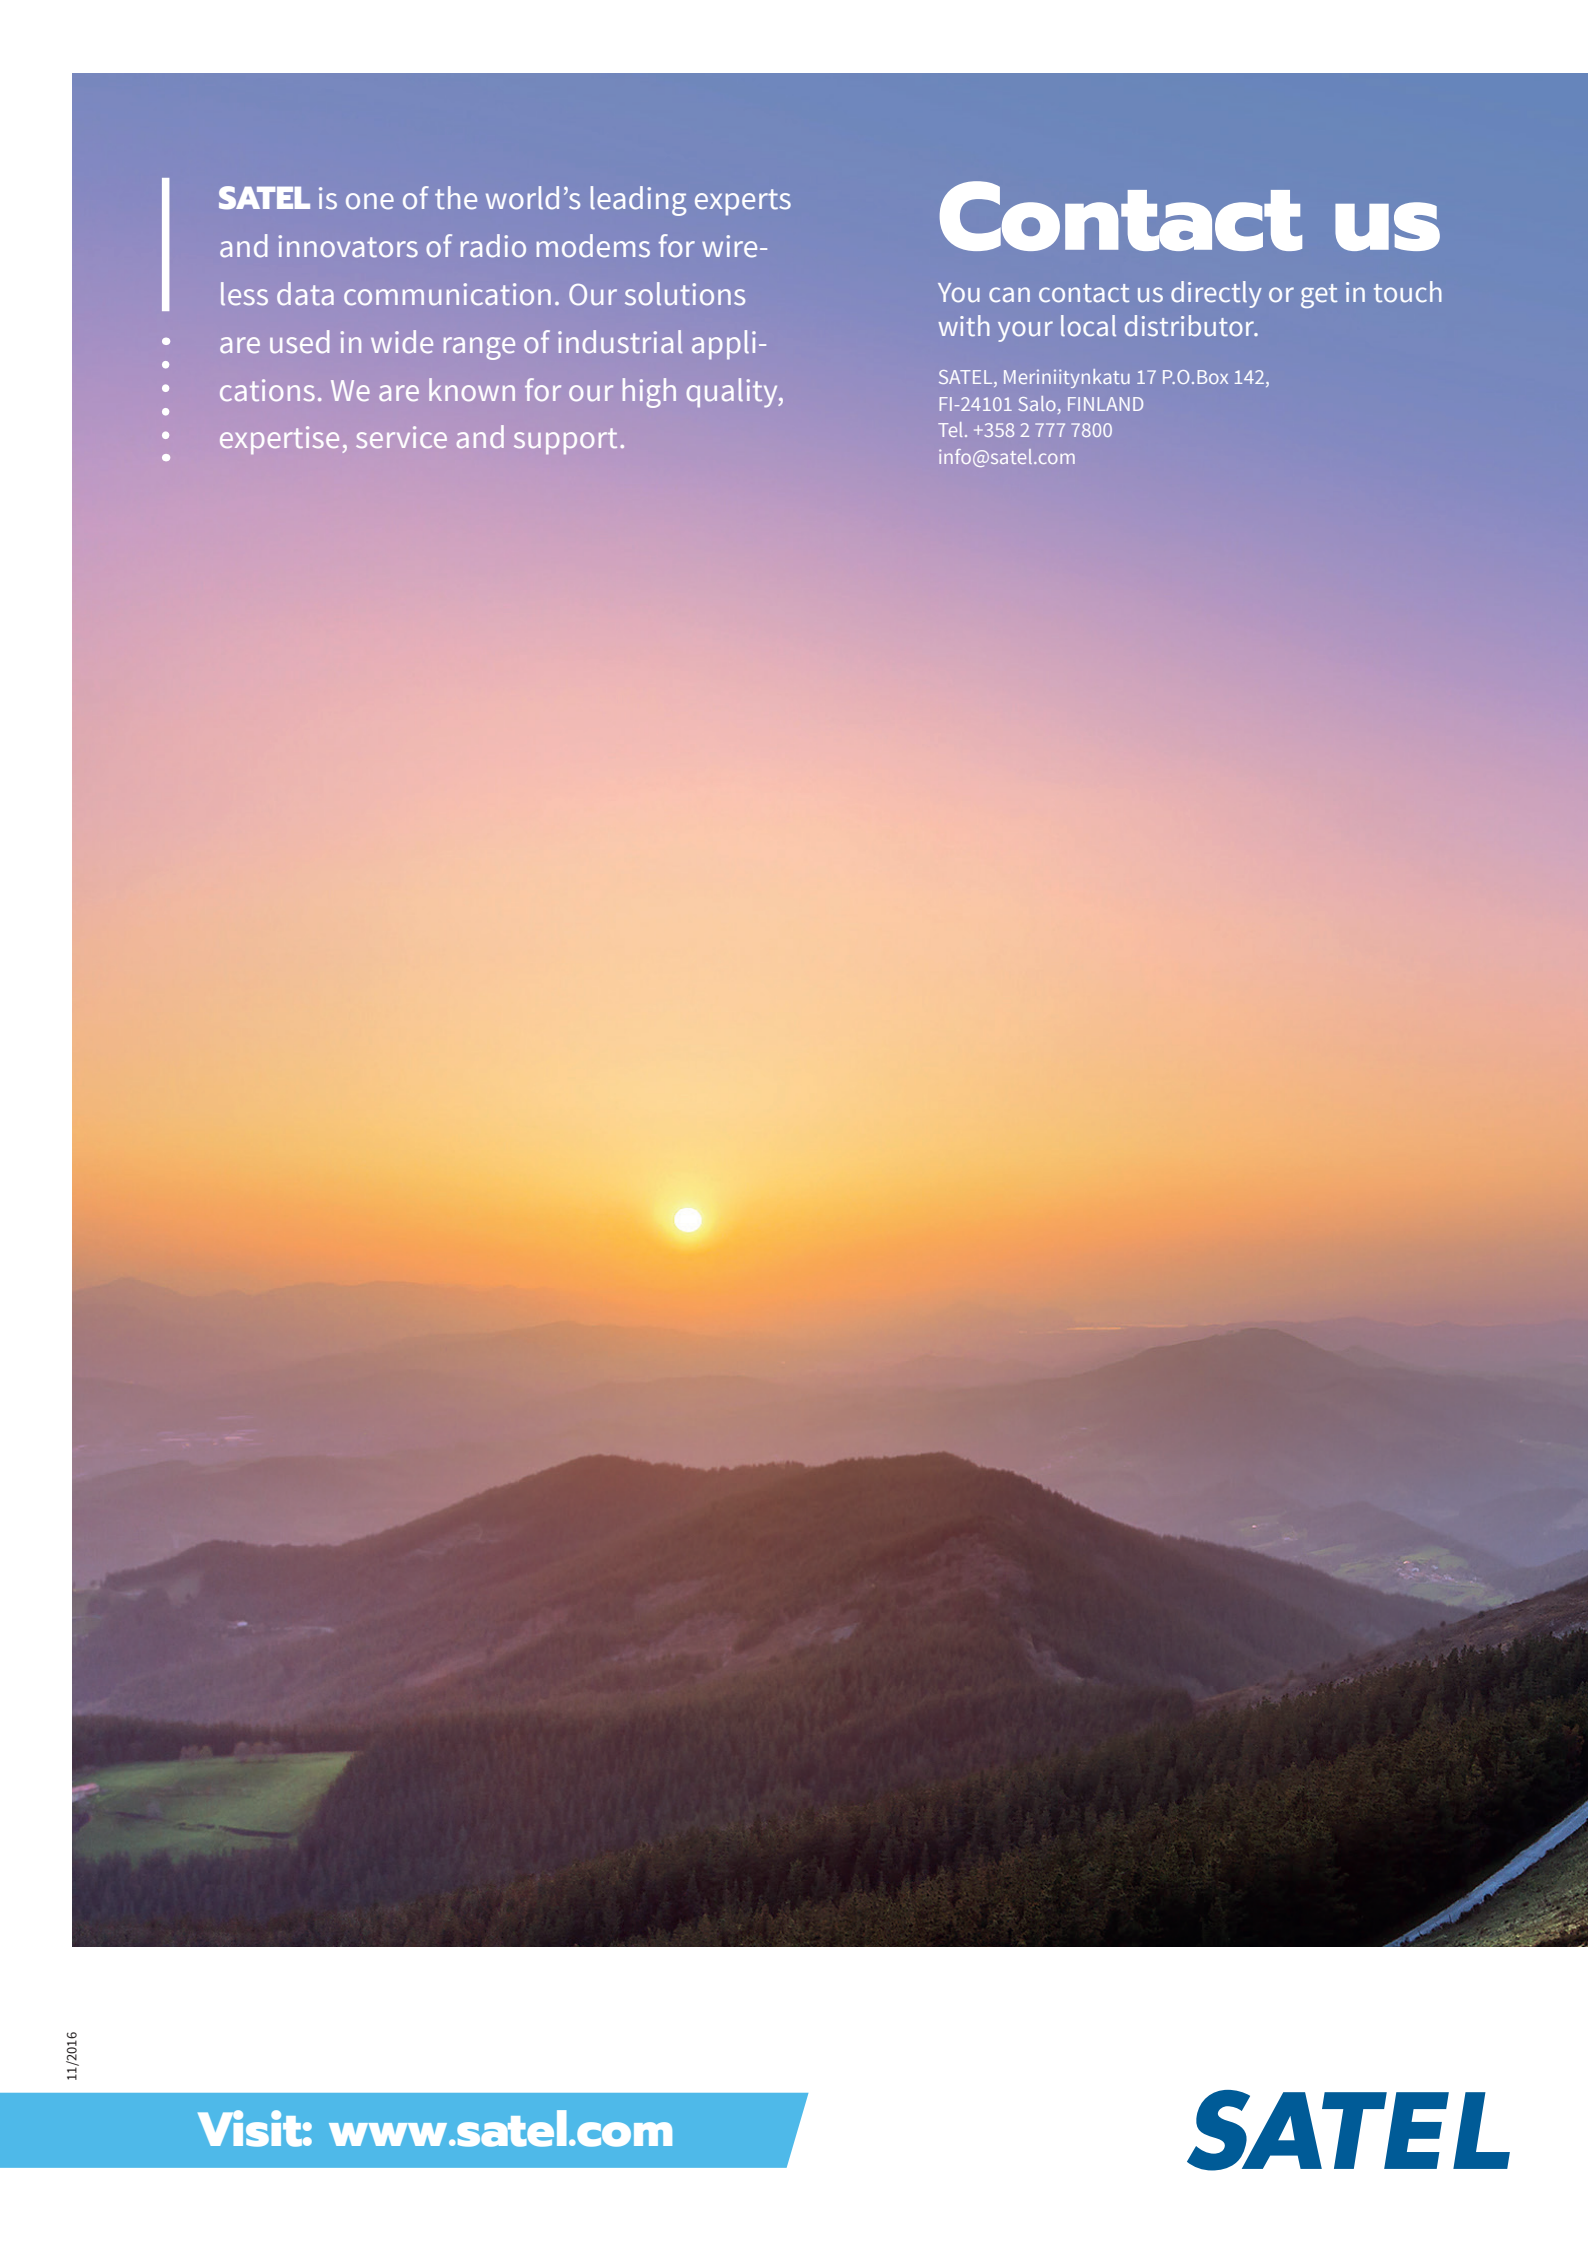

SATEL is one of the world's leading experts and innovators of radio modems for wireless data communication. Our solutions are used in wide range of industrial applications. We are known for our high quality, expertise, service and support.

Contact us

You can contact us directly or get in touch with your local distributor.

SATEL, Meriniitynkatu 17 P.O.Box 142,
FI-24101 Salo, FINLAND
Tel. +358 2 777 7800
info@satel.com